



DISTRICT PROJECT OFFICE, SAMAGRA SHIKSHA, ANGUL



Phone: 06764-232412

Fax: 06764-233808

Letter No: 21387/BRC

File No: VI/IE/22/2024-25



E-mail: dpcangulssa.opepa@nic.in
ssaangul@rediffmail.com

Date: 12/10/26

QUOTATION CALL NOTICE

Sealed quotations are invited from registered/reputed local firms/agencies/suppliers for supply/ installation/fabrication of wall mounted shelves and show case for 11 nos. of PM SHRI Schools of Angul district. The price of both materials should be within the limit allocation of Rs.46,728/- (Rupees forty six thousand seven hundred twenty eight) only including transportation and installation charges at school point.

Details of Items :

1. Supply and Installation of Iron Showcase Unit

Specifications :

A) Size:

- Width: 5 Feet
- Height: 6 Feet
- Depth: 1.5 Feet (Approx.)

B) Design & Configuration:

- Modern iron showcase consisting of:
- Full-height glass display section
- Open display shelves
- Bottom storage cabinet
- Design similar to approved sample/drawing.

C) Material Specification:

- Main frame made of **high quality MS (Mild Steel) square pipe** of minimum 25 mm × 25 mm size.
- Body and shelves made with **minimum 20 gauge MS iron sheet**.
- Structure to be properly welded, ground and finished smoothly.

D) Glass Specification:

- 5 mm thick transparent toughened glass for shutters and display shelves.
- Sliding/openable glass shutters with locking arrangement.

E) Finish:

- Surface to be treated with anti-rust primer.
- Final finish with powder coating/synthetic enamel paint of approved colour and shade.

F) Hardware & Accessories:

- Heavy duty hinges, handles and locking system.
- Rubber beading and glass supports.
- Adjustable shelf supports wherever required.

G) Lighting:

- Inbuilt LED light fittings in display section with concealed wiring arrangement.



H) Storage:

- Bottom enclosed cabinet with iron sheet shutters for storage purpose.

I) Installation:

- Complete fabrication, supply, transportation, fitting, fixing and installation at site including all materials, labour, accessories and taxes.


Warranty:

- Minimum 1 year warranty against manufacturing defects and rusting.

2. Wall Mounted Shelves Installation (Locally)

A) Size:

- Width: 10 Feet
- Height: 3 Feet
- Depth: 15 Inches

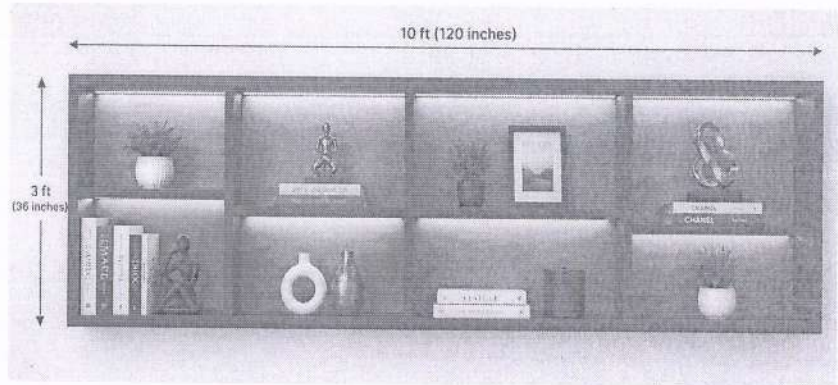

B) Design:

- Modern wall mounted modular shelf design with multiple display compartments.
- Front side fitted with transparent glass shutters/sliding glass panels.
- Suitable for display of trophies, books, decorative items and office materials.

C) Material Specification:

- Main frame fabricated with 18 Gauge MS Iron Sheet and MS square pipe frame.
- Properly welded, machine finished and smooth edged construction.
- Back panel with laminated decorative board/wooden finish sheet.

D) Glass Specification:

- Front fitted with 5 mm thick transparent toughened glass.
- Glass shutters/sliding panels with aluminium channel and locking arrangement.
- Glass edges machine polished for safety and aesthetic appearance.

E) Finish:

- Complete structure treated with anti-rust primer.
- Final finish with powder coating/synthetic enamel paint of approved shade.

F) Lighting:

- Concealed warm white LED strip lighting inside display compartments.

G) Mounting:

- Heavy duty concealed wall mounting brackets with necessary fasteners.
- Proper load bearing arrangement for safe wall installation.

H) Hardware & Accessories:

- Aluminium channels, handles, locks, hinges and glass fittings of premium quality.
- All screws, supports and fixing accessories included.

I) Installation:

- Complete fabrication, supply, transportation, fitting, fixing and installation at site including all labour and taxes.

J) Warranty:

- Minimum 1 year warranty against manufacturing defects and rusting.

Note:

- Final colour, design and layout shall be approved by the competent authority before fabrication.

Terms and Conditions

1. The interested firms/agencies shall submit sealed quotations addressed to the District Project Coordinator, Samagra Shiksha, Angul.
2. The quotation should contain:
 - a) GST Registration Certificate
 - b) PAN Card copy
 - c) Experience certificate/work experience (if any)
 - d) Rate inclusive of all taxes, transportation, installation at school point.
3. The materials used should be of good quality and as per approved specifications.
4. The work shall be completed within 20 days from the date of issue of work order.
5. The authority reserves the right to accept or reject any or all quotations without assigning any reason thereof.
6. The rate quoted should remain valid for 1 year from the date of opening of quotation.
7. Payment shall be made after successful completion and verification of the work.
8. The sealed quotation should reach the office on or before 29.10.2026 by 5.00 PM.
9. The quotations will be opened on 30.10.2026 at 11.00 AM in presence of quotationers or their authorized representatives.


DEO-cum-DPC

Samagra Shiksha, Angul

Memo No. 3139 / Date 12/10/2026

Copy to the DIO, NIC, Angul/ Programmer MIS, OSEPA, Bhubaneswar with a request to upload the quotation call notice in their respective website (**Angul district website www.angul.odisha.gov.in** and OSEPA website **www.osepa.odisha.gov.in** for wide publicity.


DEO-cum-DPC

Samagra Shiksha, Angul

Memo No. 3140 / Date 12/10/2026

Copy forwarded to the Establishment Officer, Collector & DM, Angul/ DEO-cum-DPC, Angul with request to display the quotation call notice in their Notice Board for wide publicity and healthy competition.


DEO-cum-DPC

Samagra Shiksha, Angul